



Introducing CCH® Clarifier Pro!

SKU 30497

Buy a Full Pallet of any
CCH® Pro Line PMP and
get **3 FREE** CCH® Feeder
Dosing Pumps

CCH® Clarifier Pro is a NSF 50 certified pool maintenance product! With a more concentrated formula, available in 5 gallon containers and dosed with an automated pump, the CCH® Clarifier Pro makes commercial pool care and maintenance easier!




A simple, low cost method to provide bathers with an added layer of protection against one of the most dangerous pathogens found in recreational water, Cryptosporidium!

Adding CCH® Clarifier Pro to your filtration system not only gives your facility crypto protection, it also acts as a clarifier. By increasing the filter's capacity to capture crypto, it also catches other dirt and debris that could make the pool cloudy.

- Improves water clarity
- Improves efficacy of UV systems
- Reduces turbidity by an average of 37.5%

The Model Aquatic Health Code (MAHC) is moving towards requiring all pool chemicals to be NSF certified. CCH® strives to meet evolving community, state, and national water standards with innovative solutions!

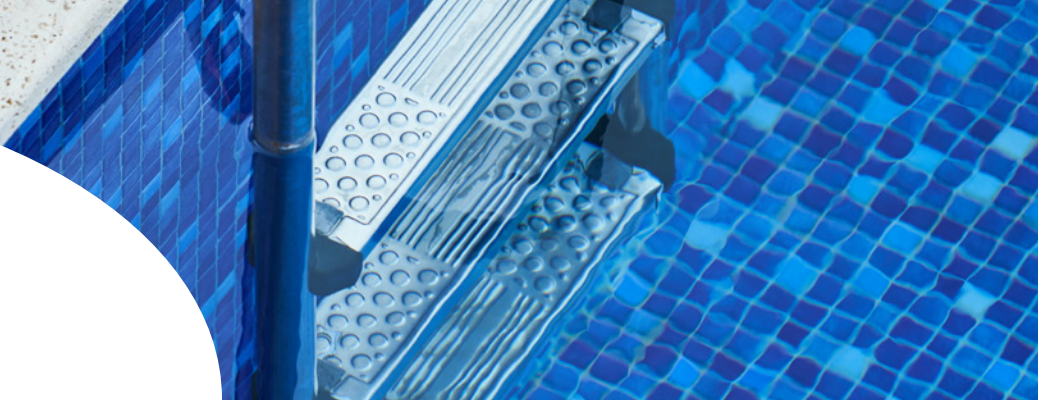

In an effort to ensure ease of use, the CCH® Clarifier Pro can be dosed multiple ways!



Best Option

SKU 74457

Using the CCH® Feeder Dosing Pump!

Featuring a 10g rotomolded tank with integrated Stenner pump – just add two 5-gallon containers of product and set to auto dosing specific to chemistry and pool size.

Buy a Full Pallet of any CCH® Pro Line PMP and get **3 FREE** CCH® Feeder Dosing Pumps



Better Option

SKU 74445

Using the Stenner pump only!

Pump can be wall mounted with tubing connected to product container and set to auto dosing to specific chemistry and pool size.



Good Option

Using a hand pump!

Hand pump can be inserted into the top of the product container and dosed to specific chemistry and pool size.

CCH® Clarifier Pro Dosing Chart

Gallons of Pool Water	Pump Setting	Hand Pump Dosing (oz)
25,000	2.5	5
50,000	5	10
100,000	10	20
150,000	15	30
200,000	20	40
250,000	25	50
300,000	30	60
500,000	50	100
750,000	75	150
1,000,000	100	200

Pump Operating Parameters

Default Output*	Up to 0.45 gal/day	Up to 1.7L/day
Max Pressure	80 psi	5.5 bar
Max Temperature	104 °F	40 °C
Motor Voltage (Amp Draw)	120V 60Hz	

*Output of up to 9.5 gallons (36L) per day is available with larger peristaltic tubing

For more information visit www.cchpoolcare.com or call us at 1-800-478-5727